



Details

Undersurfacing

Area - Approx 75 sqm

Material Specifications

- Posts - Powder-coated galvanised 75x75mm SHS steel (aluminium option)
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Powder-coated reinforced 3mm aluminium
- Slides - Rotationally moulded PE
- Ropes - Galvanised steel core nylon rope
- Climbers - Powder-coated galvanised steel
- Accessories - Various
- Tunnel - Rotationally moulded PE
- Panels - High density, UV stabilised, co-extruded PE
- Shade Roofs - Powder-coated galvanised steel

Other required information

- Spare Parts - Available to order
- Largest Part - Slide : 2.5 x 0.7 x 0.4m
Spiral climber : 3.5 x 0.6 x 0.6m
- Highest Point - 3.7m

Heaviest Part

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

- Age Group - 5 to 12 years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, early childhood centres, commercial play areas
- Environment - Shade preferred for user comfort and protection.
Salt air environments may reduce life of steel

Vandalism Resistance - Low susceptibility

The Play Works

freecall 1800 655 041


info@playworks.com.au

www.playworks.com.au

Pack includes:

- Stepping Stones
- Steering Wheel
- Spiral Climber
- Entry Arch Panel
- Stepped Fence
- Pyramid Roof
- Steel Safety Fence
- Grab Handles
- Tally Rail
- Slide Entry Panel
- Telescope
- 4 'Deckionary' Platforms
- Crawl Tunnel
- Port Hole Panel
- Clock Panel
- Wave Slide
- Illusion Spinner
- Vine Climber
- Abacus
- Rope Escalator
- Number Spots
- Roarer

Minimum Undersurfacing Requirements

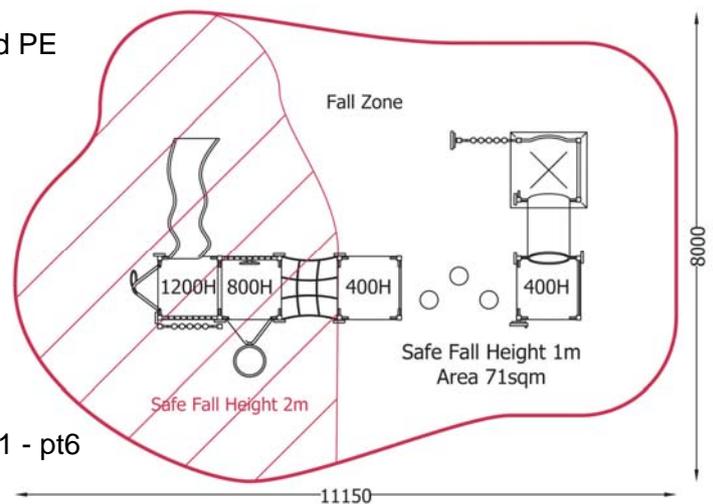



Details

Undersurfacing

Area - Approx 125 sqm

Material Specifications

- Posts - Powder-coated galvanised 75mm SHS steel (aluminium option)
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Powder-coated reinforced 3mm aluminium
- Slides - Rotationally moulded PE
- Ropes - Galvanised steel core nylon rope
- Climbers - Powder-coated galvanised steel
- Accessories - Various
- Tunnels - Rotationally moulded PE
- Panels - High density, UV stabilised, co-extruded PE

Other required information

- Spare Parts - Available to order
- Largest Part - Monkey bar : 3.1 x 1.2 x 0.2m
- Highest Point - 2.9m
- Heaviest Part

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6


Applications


- Age Group - 5 to 12 years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, commercial play areas
- Environment - Shade preferred for user comfort and protection.
- Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

Pack includes:

- Spiral Climber
- Vine Climber
- Rope Escalator
- Grab Handles
- Log Roll
- Telescope
- Wandering Monkeybar
- X-Trail
- Crawl Tunnel
- Straight Slide
- Slide Sit Down Panel
- HDPE Safety Fences
- Binoculars
- 5 'Deckionary' Platforms

Minimum Undersurfacing Requirements

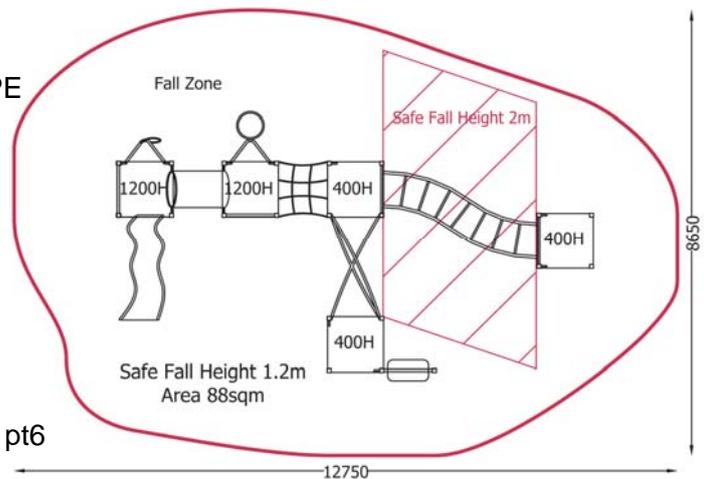

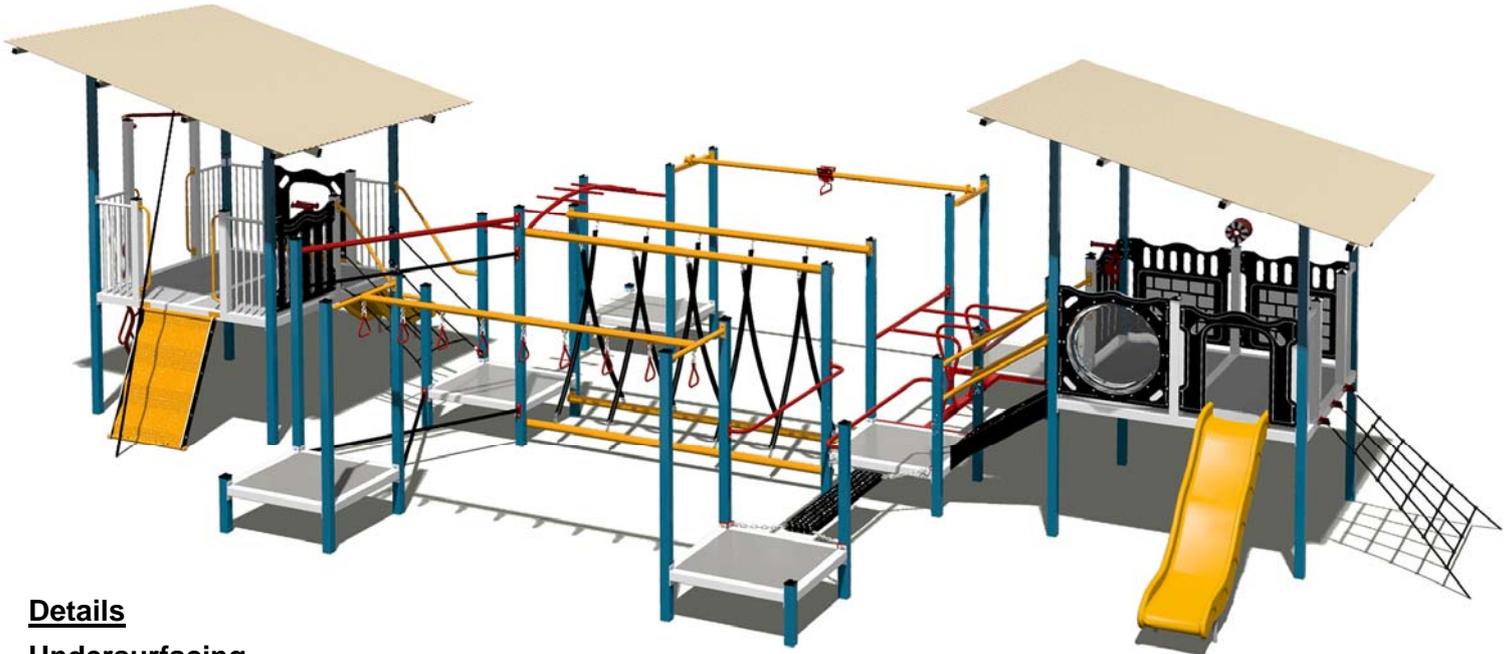

Details

Undersurfacing

Area - Approx 150 sqm

Material Specifications

- Posts - Powder-coated galvanised 75mm SHS steel (aluminium option)
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Powder-coated reinforced 3mm aluminium
- Slides - Rotationally moulded PE
- Nets - Galvanised steel core nylon rope
- Ropes - PVC sheathed stainless steel chain
- Climbers - Powder-coated galvanised steel
- Accessories - Various
- Panels - High density, UV stabilised, co-extruded PE
- Shade Roofs - Powder-coated galvanised steel frames, colorbond sheeting

Other required information

- Spare Parts - Available to order
- Largest Part - Various : 3.0 x 1.0 x 0.2m
- Posts : 4.3 x 0.1 x 0.1m
- Highest Point - 3.6m
- Heaviest Part

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6


Applications

- Age Group - 5+ years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, commercial play areas
- Environment - Shade preferred for user comfort and protection.
- Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

Pack includes:

- 6 'Deckionary' Platforms
- 2 Large Decks 2mx2m
- 2 Skillion Colorbond Roofs
- Arched Backbone Monkeybar
- Scaling Wall Climber
- Rope Escalator
- Vine Climber
- Safety Fence Panels
- Slide Entry Panels
- Telescope
- BubbleBoo Panel
- Loud Hailer
- 2 Wave Slides
- Trackride
- Black Forest
- X-Trail
- Hipster
- Ring Line
- Rope Net
- Wobbly Plank
- Steering Wheel
- Binoculars
- Castle Wall
- Stairway

Minimum Undersurfacing Requirements

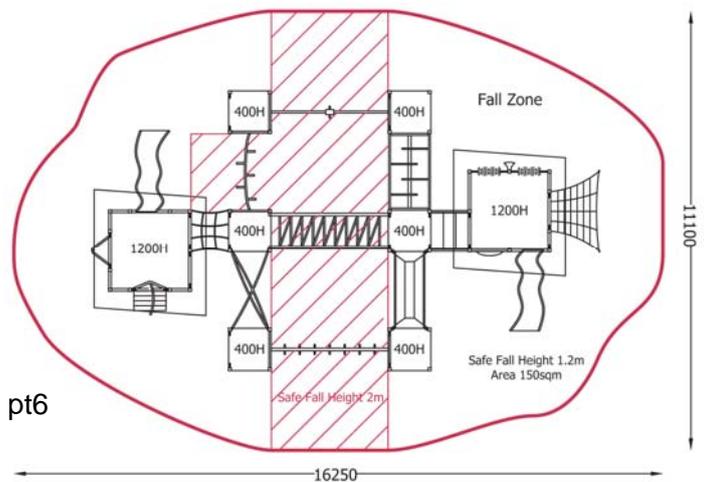



Pack includes:

- 'Deckionary' Platform
- Wave Slide
- Access Ladder
- Straight Crawl Tunnel
- HDPE Fence Panels
- Steering Wheel
- Binoculars
- Number Spots
- Grab Handles
- Pyramid Roof
- Slide Entry Panel

Details

Undersurfacing

Area - Approx 24 sqm

Material Specifications

- Posts - Powder-coated galvanised 75mm SHS steel (aluminium option)
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Powder-coated reinforced 3mm aluminium
- Slide - Rotationally moulded PE
- Climbers - Powder-coated galvanised steel
- Accessories - Various
- Tunnel - Rotationally moulded PE
- Panels - High density, UV stabilised, co-extruded PE
- Shade Roofs - Powder-coated galvanised steel

Other required information

- Spare Parts - Available to order
- Largest Parts - Slide : 2.4 x 0.7 x 0.4m
- Posts : 4.3 x 0.1 x 0.1m
- Highest Point - 3.8m

Heaviest Part

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance


Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

- Age Group - 5 to 8 years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, early childhood centres, commercial play areas
- Environment - Shade preferred for user comfort and protection.
- Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

Minimum Undersurfacing Requirements

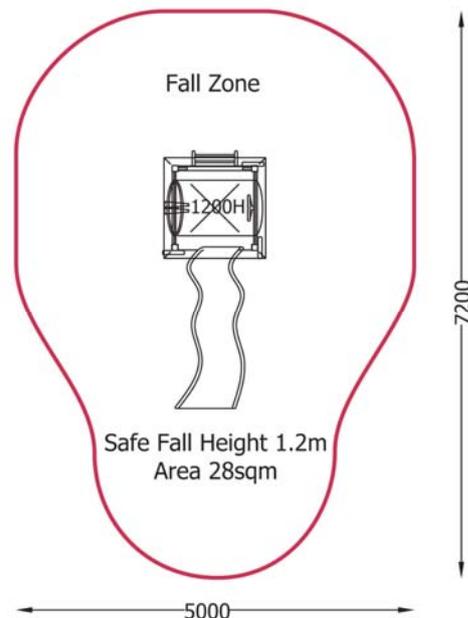



Pack includes:

- Timber Deck 1m x 1m
- Timber Deck 2m x 1m
- Wave Slide
- Slide Entry Panel
- Braille Panel
- Alphabet Panel
- Flower Climber
- HDPE Fence Panel
- Squash Guage
- Stepped Fences
- Angled Rung Ladder
- Flower Talktubes
- Steering Wheel
- Illusion Spinner
- Tally Rail
- Telescope
- Number Spots
- Height Gauge
- Grab Handles
- Pyramid Roof

Details

Undersurfacing

Area - Approx 40 sqm

Material Specifications

- Posts - Powder-coated galvanised 75mm SHS steel (aluminium option)
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Powder-coated reinforced 3mm aluminium
- Slide - Rotationally moulded PE
- Climbers - Powder-coated galvanised steel
- Accessories - Various
- Panels - High density, UV stabilised, co-extruded PE
- Shade Roofs - Powder-coated galvanised steel

Other required information

- Spare Parts - Available to order
- Largest Parts - Slide : 2.4 x 0.7 x 0.4m
- Posts : 4.3 x 0.1 x 0.1m
- Highest Point - 3.8m

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance


Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

- Age Group - 4 to 8 years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, early childhood centres, commercial play areas
- Environment - Shade preferred for user comfort and protection.
- Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

Minimum Undersurfacing Requirements

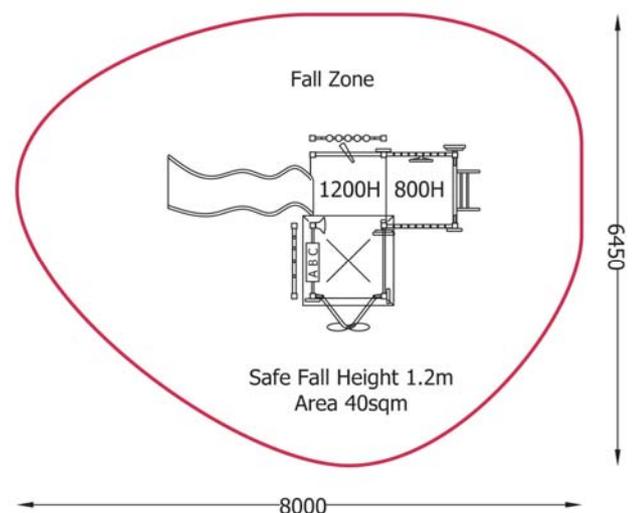



Details

Undersurfacing

Area - Approx 120 sqm

Material Specifications

- Posts - Powder-coated galvanised 75mm SHS steel (aluminium option)
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Powder-coated reinforced 3mm aluminium
- Slide, log roll - Rotationally moulded PE
- Nets - Gal steel core nylon rope
- Chains - PVC sheathed 6mm stainless steel chain
- Accessories - Powder-coated steel, aluminium, stainless steel, HDPE plastic
- Panels - High density, UV stabilised, co-extruded PE

Other required information

- Spare Parts - Available to order
- Largest Part - Slide : 3.8 x 1.6 x 0.5m
- Highest Point - 2.8m
- Heaviest Part

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1,
 AS 4685 - 2014 pt1 - pt6


Applications

- Age Group - 6 to 13 years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, commercial play areas
- Environment - Shade preferred for user comfort and protection.
 - Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

Pack includes:

- 7 'Deckionary' Platforms
- Bigfoot Double Slide
- Slide Wave Bar
- Rope Scramble Net
- Bubbleboo Panel
- Intermediate Stairs
- Spiderweb Wall
- Straight Monkeybar
- Tandem JumpTouch Game
- Fire Pole
- Abacus Panel
- Log Roll
- Pommel Train
- Stepped Fence
- Burmese Bridge
- X Trail
- Illusion Spinner
- Grab Handles

Minimum Undersurfacing Requirements

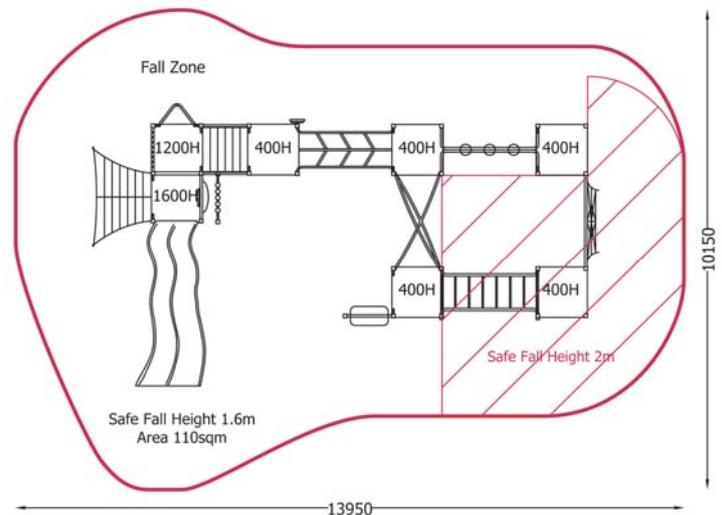



Details

Undersurfacing

Area - Approx 120 sqm

Material Specifications

- Posts - Powder-coated galvanised 75mm SHS steel (aluminium option)
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Powder-coated reinforced 3mm aluminium
- Slide - Rotationally moulded PE
- Ropes - Galvanised steel core nylon rope
- Shop Counter - Powder-coated aluminium, HDPE
- Accessories - Various
- X-Trail - 6mm stainless steel chain

Other required information


- Spare Parts - Available to order
- Largest Part - Frame : 3.0 x 1.0 x 0.6m
- Highest Point - 2.6m
- Heaviest Part

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

Pack includes:

- 6 'Deckionary' Platforms
- Balcony Platform
- Slide Entry Frame
- Angled Rung Ladder
- Rope Escalator
- Grocer's Scales
- Rope U Bridge
- Rope Scramble Net
- Steel Safety Panels
- Yin-Yang Spinner
- Jump Touch Game
- Grab Handles
- Wave Slide
- Vine Climber
- X-Trail
- Shop Counter
- Cash Register
- Wall Phone
- Pommel Train
- Loud Hailer
- Binoculars
- Steering Wheel
- Illusion Spinner

Minimum Undersurfacing Requirements

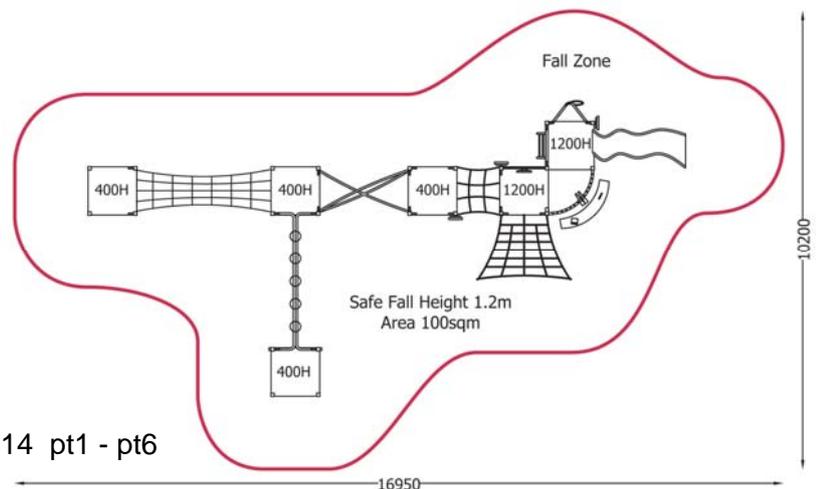


Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

- Age Group - 4 years +
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, early childhood centres, commercial play areas
- Environment - Shade preferred for user comfort and protection.
- Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

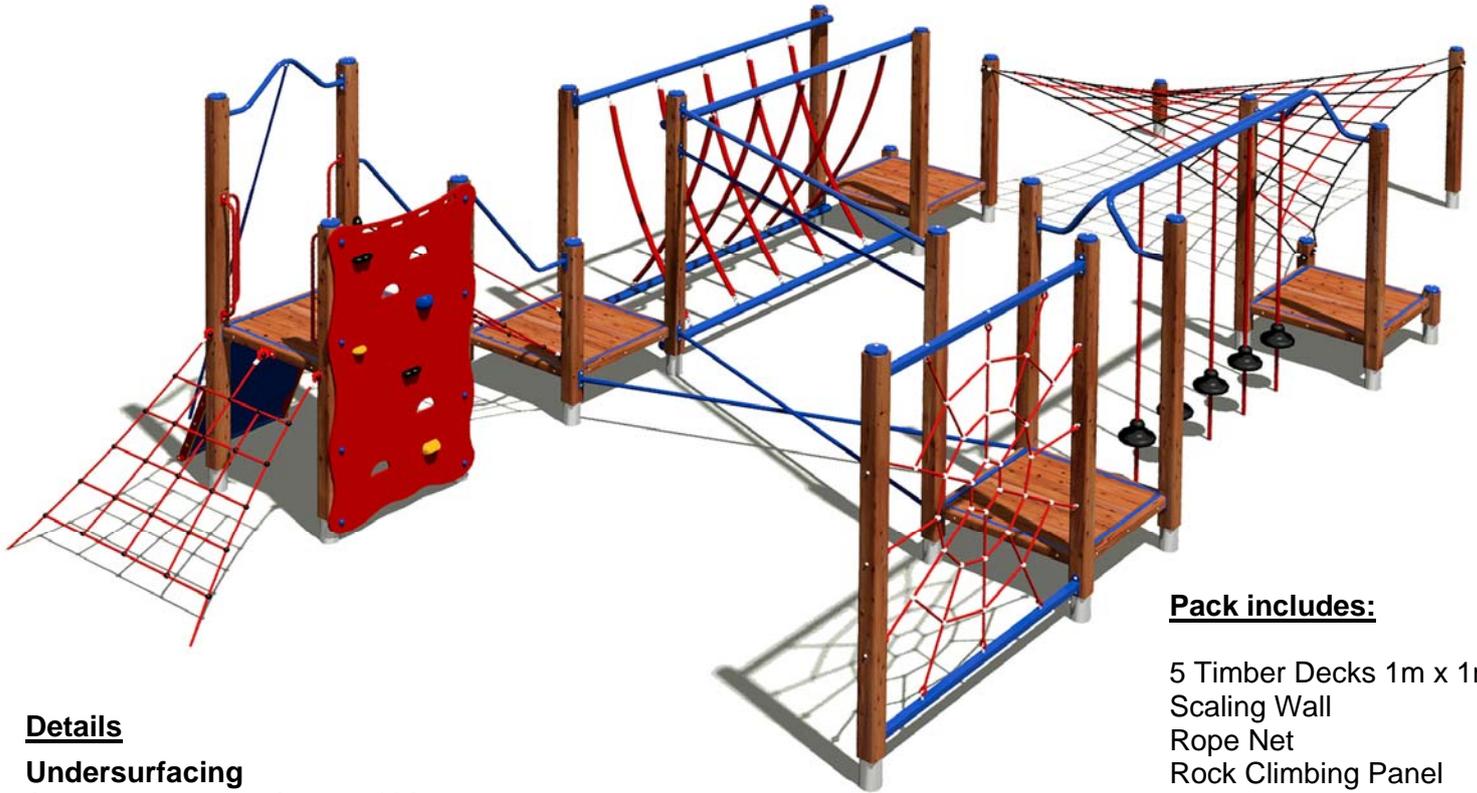

Details

Undersurfacing

Area - Approx 130 sqm

Material Specifications

- Posts - 115X115mm cypress, galvanised steel footing
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Steel frame, 90 x 32 cypress
- Nets - Galvanised steel core nylon rope
- Chains - PVC sheathed 6mm stainless steel chain

Pack includes:

- 5 Timber Decks 1m x 1m
- Scaling Wall
- Rope Net
- Rock Climbing Panel
- Rope Escalator
- Black Forest
- Saddle Net
- Pommel Train
- Rope Spiderweb Wall
- X-Trail
- Grab Handles

Other required information

- Spare Parts - Available to order
- Largest Part - Pommel frame : 3.0 x 1.0 x 0.6m
 - Posts : 3.7 x 0.2 x 0.2m
- Highest Point - 3.3m

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance


Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

- Age Group - 7+ years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, commercial play areas
- Environment - Shade preferred for user comfort and protection.
 - Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

Minimum Undersurfacing Requirements

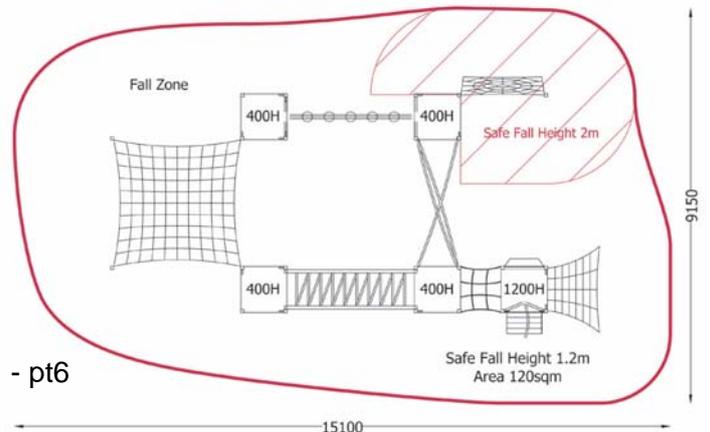



Details

Undersurfacing

Area - Approx 135sqm

Material Specifications

- Posts** - Powder-coated galvanised 75mm SHS steel (aluminium option)
- Caps** - Powder-coated cast aluminium
- Frames** - Powder-coated galvanised steel
- Fixings** - M10 stainless steel Torx security bolts
- Platforms** - Powder-coated reinforced 3mm aluminium
- Slide** - Rotationally moulded PE
- Ropes** - Galvanised steel cored nylon combination rope
- Accessories** - Various
- Panels** - High density, UV stabilised, co-extruded PE
- Shade Roofs** - Powder-coated galvanised steel frames, colorbond sheeting

Pack includes:

- Big Deck 2m x 2m
- 5 'Deckionary' Platforms
- Curved Colorbond Roof
- Slide Entry Frame
- HDPE Fence Panel
- Rope U Bridge
- Angled Rung Ladder
- Safety Fence Panels
- Tandem JumpTouch Game
- Yin-Yang Spinner
- Rope Net
- Wave Slide
- Scaling Wall
- Track Ride
- Turn Bar
- Rope Tunnel
- Pommel Train
- Twin Ring Line
- Spiral Spinner
- Grab Handles

Other required information

- Spare Parts - Available to order
- Largest Part - Frame : 3.0 x 1.0 x 0.4m
- Highest Point - 3.5m
- Heaviest Part

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

- Age Group - 7+ years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, commercial play areas
- Environment - Shade preferred for user comfort and protection.
- Salt air environments may reduce life of steel

Vandalism Resistance - Low susceptibility


The Play Works

freecall 1800 655 041

info@playworks.com.au

www.playworks.com.au

Minimum Undersurfacing Requirements

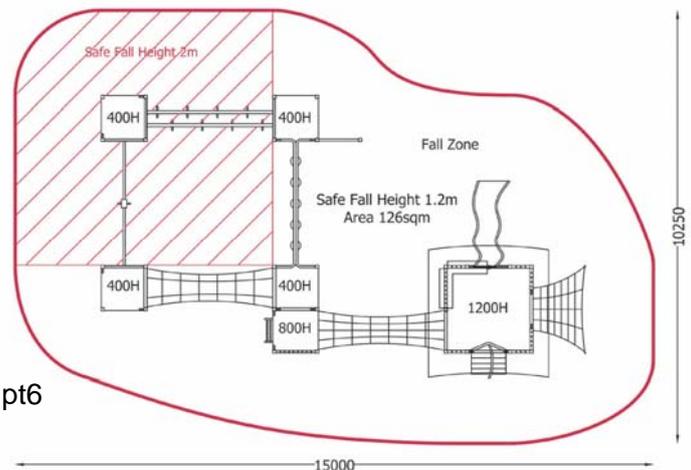



Details

Undersurfacing

Area - Approx 87 sqm

Material Specifications

- Posts - 115x115mm Cypress timber, galvanised steel footing
- Caps - Powder-coated cast aluminium
- Frames - Powder-coated galvanised steel
- Fixings - M10 stainless steel Torx security bolts
- Platforms - Steel frame, 90 x 32 cypress
- Slide - Rotationally moulded PE
- Nets, bridge - Galvanised steel cored nylon rope
- Rock Climb - HDPE
- Shade Roofs - Powder-coated galvanised steel frames, colorbond sheeting

Other required information

- Spare Parts - Available to order
- Largest Part - Slide : 2.4 x 0.7 x 0.4m
 - Posts : 4.0 x 0.2 x 0.2m
- Highest Point - 3.7m

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

- Age Group - 7+ years
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Public parks, schools, commercial play areas
- Environment - Shade preferred for user comfort and protection.
 - Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility

Pack includes:

- Rope Spiderweb Wall
- Rock Climbing Panel
- Big Timber Deck 2mx2m
- 2 Timber Platforms 1mx1m
- Angled Rung Ladder
- Steel Safety Fences
- Pitched Colorbond Roof
- Wave Slide
- Rope Net
- Rope U Bridge
- Vine Climber
- Slide Entry Frame
- Grab Handles

Minimum Undersurfacing Requirements

